
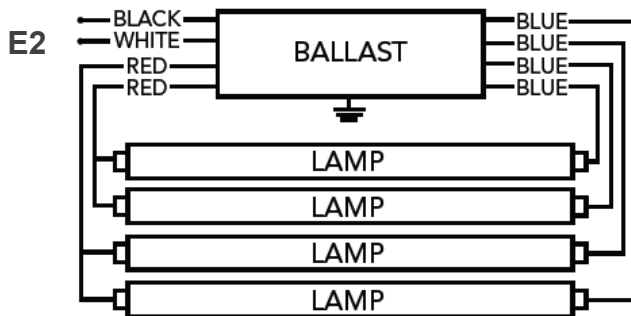
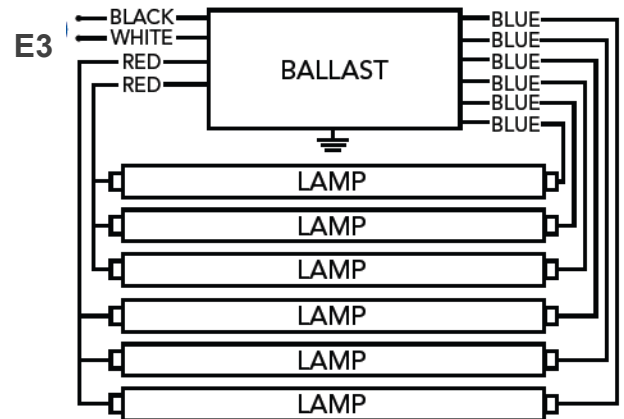


EBO Series Electronic High Output Sign Ballasts
Parallel Lamp Operation

High Output Rapid Start T12 Lamps, 120-v 50/60Hz

Model #	#of Lamps	Footage		Max.		Open Circuit Voltage	Wt (lbs)	Wiring Diagram	Max. lamp length
		Min.	Max.	Input Amp (A)	Input Watt (W)				
EBO-3-8-24	1 to 3	4	24	1.8	180	600	5	E1	8
EBO-6-8-32	1 to 6	8	32	1.7	204	600	8	E3	8
EBO-4-10-40*	1 to 4	10	40	2.4	320	740	8	E2	10
EBO-6-8-48	2 to 6	10	48	3.6	350	700	8	E3	8

- *Note: EBO-4-10-40 can be used with 10 foot lamps only
- Lamps are parallel wired, so if one lamp goes out, the others remain operating.

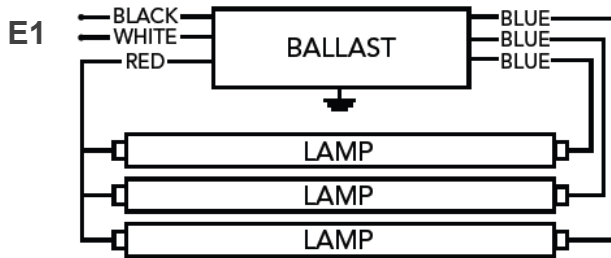

**EBO Series Electronic High Output Sign Ballasts
Parallel Lamp Operation**

Lead Lengths and Case Dimensions										
Model #	Lead Length (Feet)					Dimensions				
120 Volt 50/60 Hz	Black	White	Green	Red	Blue	L	W	H	WI	Mw
EBO-3-8-24	2.5	2.5	0.7	11	11	10.5	3	1.75	11.75	2
EBO-6-8-32	2.5	2.5	0.7	11	11	13	3	2.5	13.75	2
EBO-4-10-40	2.5	2.5	0.7	11	11	13	3	2.5	13.75	2
EBO-6-8-48	2.5	2.5	0.7	11	11	13	3	2.5	13.75	2

